


* Idoneo al contatto con alimenti che richiedono un liquido simulante del tipo A-B-C secondo 90/128 CEE e SUCC. MOD. Prove di migrazione eseguite a 40° C per 24 ore.
 * Suitable for the contact with foodstuff that requires a simulating liquid type A-B-C in accordance with 90/128 CEE and following modifications. Migration tests made at 40° C for 24 hours.

Ø int. I. D. Ø int. Ø int. mm.	Ø est. O. D. Ø ext. Ø ext. mm.	press. esercizio / working pressure Presión trab. / pression service bar			press. sc. burst press. Pres. reven. press. éclat. bar	lunghezza rotoli coil length Long. Rollos long. couronnes mtr.
		20° C bar	40° C bar	60° C bar		
4	10	20	16	12	60	100
5	11	20	16	12	60	100
6	11	20	16	12	60	100
6	12	20	16	12	60	100
6	14	20	16	12	60	100
7	13	20	16	12	60	100
8	13	18	13	9	54	100
8	14	18	13	9	54	100
8	17	18	13	9	54	100
9	15	18	13	9	54	100
10	15	18	13	9	54	100
10	16	18	13	9	54	100
12	17	12	9	6	36	50
12	18	12	9	6	36	50
13	18	12	9	6	36	50
13	19	12	9	6	36	50
15	21	10	7	4	30	50
15	23	10	7	4	30	50
16	21	10	7	4	30	50
16	22	10	7	4	30	50
19	25	10	7	4	30	50
19	26	10	7	4	30	50
22	30	8	5	3	24	50
25	32	8	5	3	24	50
25	33	8	5	3	24	50
30	38	8	5	3	24	50
32	42	8	4	2	24	50
35	45	8	4	2	24	50
38	48	8	4	2	24	50
40	50	8	4	2	24	50
45	55	8	4	2	24	50
50	62	8	4	2	24	25

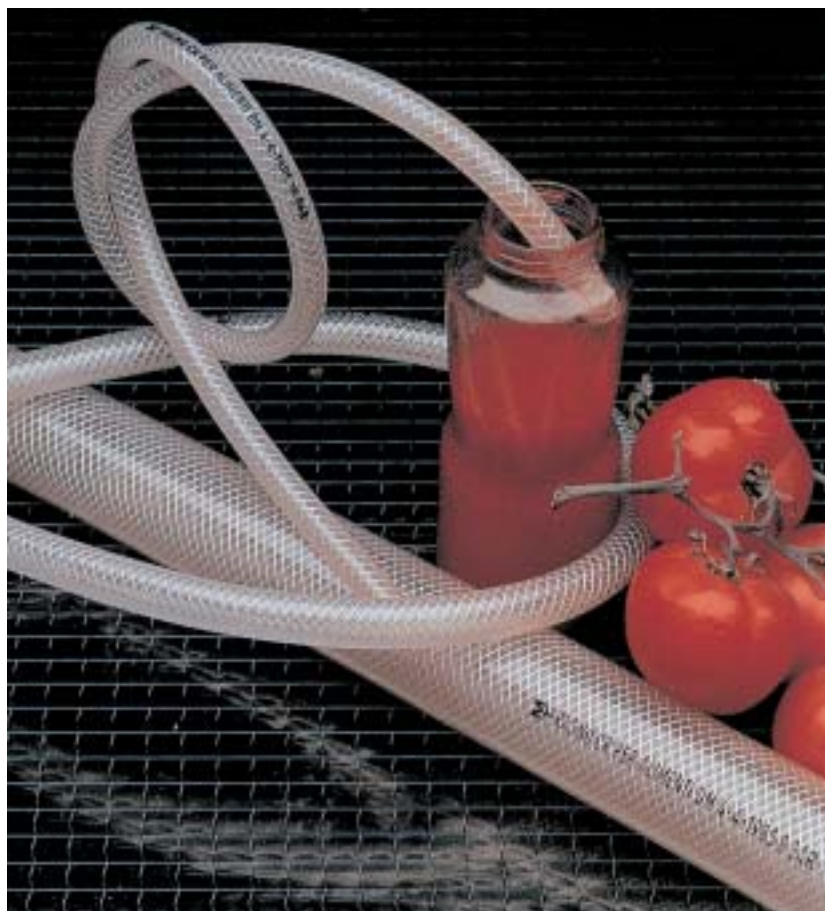

CARATTERISTICHE

Tubo flessibile resistente agli agenti atmosferici. Temperatura: -5° C +60° C.

Flexible hose resistant to weather conditions. Temperature range: -5° C +60° C.

Manguera flexible y transparente reforzada, resistente a los agentes atmosféricos. Temperatura de trabajo: -5°C hasta +60°C.

Tuyau flexible résistant à l'action des agents atmosphériques. Température d'emploi: -5° C +60° C.

USO


Passaggio liquidi di raffreddamento, soluzioni chimiche, industria alimentare e conserviera, aria compressa.

Applications: delivery of cooling liquids, chemical solutions, in the food and can industry, compressed air.

Paso de líquidos incluso alimentarios, líquidos de refrigeración, soluciones químicas, industria alimentaria y conservera, aire comprimido.

Utilisations: passage de liquides de refroidissement, produits chimiques, dans l'industrie alimentaire, pour l'air comprimé.

STRUTTURA

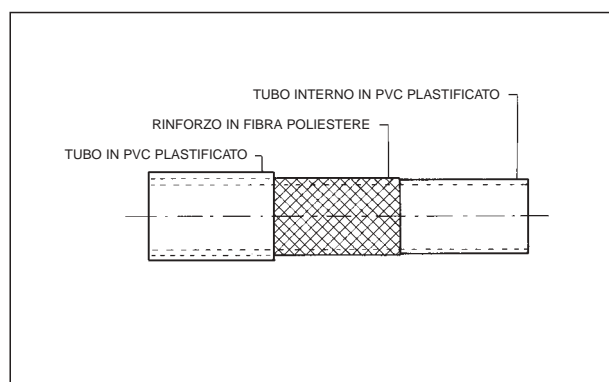

PVC plastificato con rinforzo interno in fibra poliestere.

Soft PVC hose with polyester reinforcement.

PVC plastificado con refuerzo interior de fibra de poliéster.

Tuyau en PVC souple avec renforcement en fil polyester.